


Zehnder Subway

Overview of models

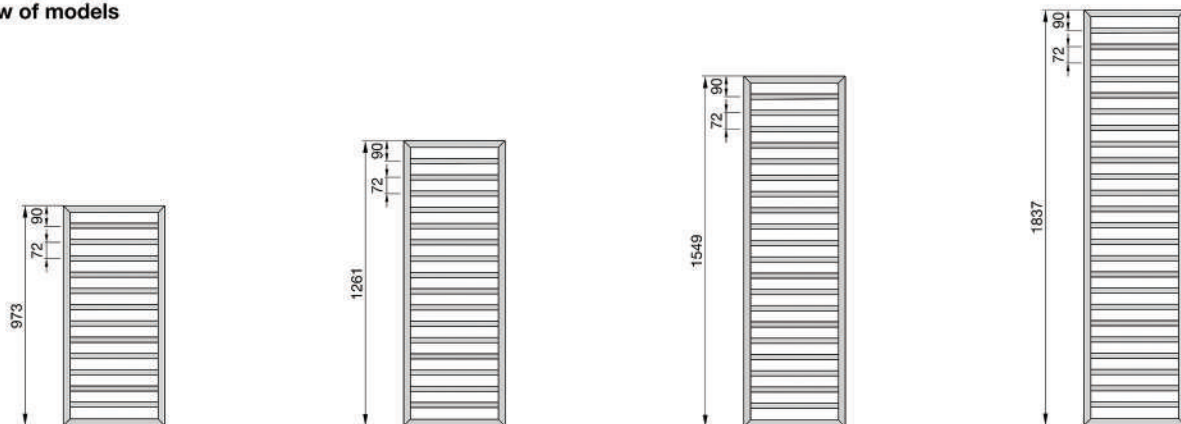

Connection to hot water central heating system

Painted version

Model	H mm	L mm	Thermal output				Exp. n	Classification Electric heating element Watt	V dm ³	M kg	Price RAL 9016 €	Price ^① Cat. 1 €	Article number ^② RAL 9016
			EN 442 ^③ W	70/55/24 W	55/45/24 W	55/45/20 W							
SUB-100-045	973	450	401	286	175	210	1,25	300	3,5	6,7	275,64	368,80	ZS300445B100000
SUB-130-045	1261	450	509	363	222	267	1,25	300	4,5	8,6	317,70	374,01	ZS300145B100000
SUB-150-045	1549	450	615	438	268	322	1,25	600	5,4	10,6	373,75	430,05	ZS300245B100000
SUB-180-045	1837	450	715	511	314	377	1,24	600	6,3	12,2	418,60	481,40	ZS300345B100000
SUB-100-060	973	600	499	356	218	262	1,25	300	4,3	8,3	290,59	390,56	ZS300460B100000
SUB-130-060	1261	600	639	455	279	335	1,25	600	5,4	10,5	333,88	390,20	ZS300160B100000
SUB-150-060	1549	600	772	550	337	405	1,25	600	7,2	12,5	393,69	452,74	ZS300260B100000
SUB-180-060	1837	600	898	642	395	473	1,24	900	7,7	14,7	441,05	507,18	ZS300360B100000

Chrome-plated version

Model	H mm	L mm	Thermal output				Exp. n	Classification Electric heating element Watt	V dm ³	M kg	Price Chrome €	Article number Chrome
			EN 442 ^③ W	70/55/24 W	55/45/24 W	55/45/20 W						
SUBC-100-045	973	450	265	188	114	137	1,27	300	3,5	6,5	681,09	ZS300445CR00000
SUBC-130-045	1261	450	336	238	145	174	1,27	300	4,5	8,4	751,25	ZS300145CR00000
SUBC-150-045	1549	450	413	293	178	214	1,27	300	5,4	10,1	887,04	ZS300245CR00000
SUBC-180-045	1837	450	486	345	209	252	1,27	300	6,3	11,8	991,68	ZS300345CR00000
SUBC-100-060	973	600	329	234	143	172	1,26	300	4,3	8,1	717,47	ZS300460CR00000
SUBC-130-060	1261	600	408	290	177	213	1,26	300	5,4	10,2	791,11	ZS300160CR00000
SUBC-150-060	1549	600	502	357	218	262	1,26	300	7,2	12,3	933,15	ZS300260CR00000
SUBC-180-060	1837	600	590	419	256	308	1,26	600	7,7	14,3	1.044,01	ZS300360CR00000

Stainless-steel version

Model	H mm	L mm	Thermal output				Exp. n	Classification Electric heating element Watt	V dm ³	M kg	Price Stainless steel €	Article number Stainless steel
			EN 442 ^③ W	70/55/24 W	55/45/24 W	55/45/20 W						
SUBI-100-045	973	450	287	203	124	149	1,27	300	3,5	6,7	853,02	ZS4004450000000
SUBI-130-045	1261	450	370	262	159	192	1,27	300	4,5	8,7	941,85	ZS4001450000000
SUBI-150-045	1549	450	445	315	192	231	1,27	300	5,4	10,4	1.121,28	ZS4002450000000
SUBI-180-045	1837	450	523	370	224	270	1,28	300	6,3	12,2	1.348,00	ZS4003450000000
SUBI-100-060	973	600	356	253	154	186	1,26	300	4,3	8,3	907,02	ZS4004600000000
SUBI-130-060	1261	600	447	318	194	233	1,26	300	5,4	10,4	1.000,41	ZS4001600000000
SUBI-150-060	1549	600	538	383	235	282	1,25	300	7,2	12,4	1.191,03	ZS4002600000000
SUBI-180-060	1837	600	633	454	280	335	1,23	600	7,7	14,4	1.431,48	ZS4003600000000

① For special colours in categories 1 and 2, see "Special solutions" and "Colour chart"

② For article numbers for special colours in category 1, see keyword list

③ Thermal output to EN 442, ΔT 50 K (75/65/20°C)