

EGYFÁZISÚ - Rating

Hőcserélő : B10THx40/1P

1. foly old. : Water
 2. foly old. : Water

Áramtíp. : Ellenáram

Oldal 1 : Belső kör
 Oldal 2 : Külső áramkör

SSP Alias : B10T

TELJESÍTMÉNY

		Oldal 1	Oldal 2
Teljesít.	kW	130,0	
Bemeneti hőm.	°C	80,00	10,00
Kimeneti hőm.	°C	60,00	60,00
Átf. seb.	kg/s	1,551	0,6223
Max. nyomásesés	kPa	40,0	40,0
Hőhossz		0,611	1,527

LEMEZES HŐCSERÉLŐ

		Oldal 1	Oldal 2
Teljes hőátvitel felület	m ²	1,18	
Hőáramlás	kW/m ²	110	
Átlag hőmérséklet eltérés	K	32,74	
O.H.T.C. (rend. áll./szüks.)	W/m ² , °C	5640/3370	
Teljes nyomásesés*	kPa	28,7	4,87
- a csatl.	kPa	5,78	0,914
Csatl. átmérő	mm	24,0/24,0 (fel/le)	24,0/24,0 (fel/le)
Csatornák száma		19	20
Lemezek száma		40	
Felület tart.	%	67	
Eltöm. faktor	m ² , °C/kW	0,117	
Reynolds szám		3573	764,8
Area Averaged Port velocity	m/s	3,51	1,38
Port velocity	m/s	3,51/3,51 (fel/le)	1,38/1,38 (fel/le)

FIZIKAI TULAJDONS.

		Oldal 1	Oldal 2
Ref. hőmérséklet	°C	70,00	35,00
Din. viszkozitás	cP	0,404	0,720
Din. viszkozitás - fal	cP	0,466	0,489
- Sűrűség	kg/m ³	977,7	994,1
- Hőlead. telj.	kJ/kg, °C	4,192	4,178
- Hővezetés	W/m, °C	0,6631	0,6233
Largest wall temperature difference	K	5,52	
Min. folyadék hőm. a falnál	°C	46,23	40,71
Max. folyadék hőm. a falnál	°C	74,49	72,28
Réteg koeff.	W/m ² , °C	20500	9190
Average wall temperature	°C	60,13	57,00
Csat. sebesség	m/s	0,369	0,138
Nyírófesz.	Pa	94,4	16,3


ÖSSZ

Total weight empty (excl. connections)	kg	4,59 - 5,94
Total weight filled (excl. connections)	kg	6,94 - 8,29
Hold-up volume, inner circuit	dm ³	1,16
Hold-up volume, outer circuit	dm ³	1,22
Port size F1/P1	mm	24,0
Port size F2/P2	mm	24,0
Port size F3/P3	mm	24,0
Port size F4/P4	mm	24,0
NND F1/P1	mm	18,0 and/or 27,0
NND F2/P2	mm	18,0 and/or 27,0
NND F3/P3	mm	18,0 and/or 27,0
NND F4/P4	mm	18,0 and/or 27,0
Carbon footprint	kg	35,1

Oldal 1

Oldal 2

MÉRETEK

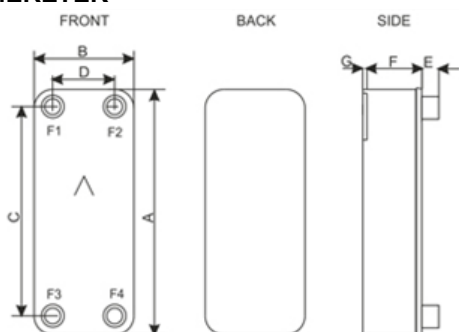

This is a schematic sketch. For correct drawings please use the order drawing function or contact your SWEP representative.

A	mm	289 +/-2
B	mm	119 +/-1
C	mm	243 +/-1
D	mm	72 +/-1
E	mm	20 (opt. 45) +/-1
F	mm	93,60 to 97,60 +2%/-1,5%
G	mm	4 to 6 +/-1
R	mm	22 to 23

Disclaimer: Data used in this calculation is subject to change without notice. SWEP strives to use "best practice" for the calculations leading to the above results. Calculation is intended to show thermal and hydraulic performance, no consideration has been taken to mechanical strength of the product. Product restrictions - such as pressure, temperatures and corrosion resistance- can be found in SWEP product sheets and other technical documentation. SWEP may have patents, trademarks, copyrights or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from SWEP, the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property. To the maximum extent permitted by applicable law, the software, the calculations and the results are provided without warranties of any kind, whether express or implied. No advice or information obtained through use of the software (including information provided in the results), will create any warranty not expressly stated in the applicable license terms. Without limiting the foregoing, SWEP does not warrant that the content (including the calculations and the results) is accurate, reliable or correct. SWEP does not warrant that any system comprising heat exchanger and other components, installed on the basis of calculations in this software, will meet your requirements or function to your satisfaction or expectations.

*Kiv. a nyomásesést a csatlakozásoknál.